



Pedotransfer Functions for Estimating Saturated Hydraulic Conductivity of Selected Benchmark Soils in Ghana

Henry Oppong Tuffour^{1*}, Awudu Abubakari¹, Alex Amerh Agbeshie^{1,2}, Abdul Aziz Khalid³, Erasmus Narteh Tetteh⁴, Ali Keshavarzi⁵, Mensah Bonsu¹, Charles Quansah¹, Jimmy Clifford Oppong⁶ and Lawrence Danso^{1,7}

¹*Department of Crop and Soil Sciences, Kwame Nkrumah University of Science and Technology, Kumasi, Ghana.*

²*Department of Environmental Management, University of Energy and Natural Resources, Sunyani, Ghana.*

³*Department of Horticulture and Crop Production, University of Energy and Natural Resources, Dormaa-Ahenkro, Ghana.*

⁴*Crops Research Institute, Council for Scientific and Industrial Research, Kumasi, Ghana.*

⁵*Department of Soil Science Engineering, University of Tehran, Iran.*

⁶*Institute of Environmental and Sanitation Studies, University of Ghana, Legon – Accra, Ghana.*

⁷*Zoomlion Ghana Limited, Kumasi, Ghana.*

Authors' contributions

This work was carried out in group effort by all authors. Authors HOT, MB, CQ, AK and AA designed the study and wrote the protocol. Authors HOT, AA, ENT, JCO, LD and AAK conducted the study, generated and analyzed the data. Authors HOT, AAA, AK, ENT, LD and JCO managed the literature searches. Authors HOT, MB and CQ prepared the manuscript. All authors reviewed the pre-submission draft, read and approved the final manuscript.

Article Information

DOI: 10.9734/ASRJ/2019/v2i230046

Editor(s):

(1) Dr. Kolawole Oladejo Gani, Professor, Department of Crop Production and Soil Science, Faculty of Agricultural Sciences, Ladoké Akintola University of Technology, Ogbomoso, Nigeria.

(2) Dr. Tuneera Bhaduria, Professor, Department of Zoology, Feroze Gandhi P.G. College, India.

Reviewers:

(1) Jakub Nieć, University of Life Sciences, Poland.

(2) Nordiana Mohd Muztaza, Universiti Sains Malaysia, Malaysia.

Complete Peer review History: <http://www.sdiarticle3.com/review-history/47970>

Original Research Article

Received 01 March 2019

Accepted 11 May 2019

Published 20 May 2019

ABSTRACT

Aims: Direct methods of measuring saturated hydraulic conductivity (K_s), either *in situ* or in the laboratory, are time consuming and very expensive. Several Pedotransfer functions (PTFs) are available for estimating K_s , with each having its own limitations. In this study, the performances of four popular PTFs were evaluated on different soil classes in the semi deciduous zone of Ghana. The PTFs considered herein were Puckett et al. (1985), Campbell and Shiozawa (1994), Dane and Puckett (1994), and Ferrer-Julià et al. (2004). In addition, five local data derived PTFs were used to study the possibility of using local datasets to validate PTF accuracy.

Materials and Methods: A total of 450 undisturbed soil cores were collected from the 0 – 15 cm depth from three benchmark soils, namely, Stagni-Dystric Gleysol (SDG), Plinthi Ferric Acrisol (PFA) and Plinthic Acrisol (PA). The K_s of samples were measured by the falling-head permeameter method in the laboratory. Sand, silt and clay fractions, bulk density, organic matter content, and exchangeable calcium and sodium were measured and used as input parameters for the newly derived PTFs. Accuracy and reliability of the predictions were evaluated by the root mean square error (RMSE), coefficient of correlation (r), index of agreement (d), and the Nash-Sutcliffe efficiency (NSE) between the measured and predicted values from both tested and newly derived PTFs. The relative improvement (R) of the newly derived PTFs from this study over the existing ones were also evaluated.

Results: The newly derived PTFs in this study had higher prediction accuracy with r , d , RMSE and NSE ranging from 0.80 – 0.99, 0.79 – 0.94, 0.14 – 1.74 and 0.84 – 0.98, respectively, compared with 0.32 – 0.45, 0.27 – 0.50, 4.00 – 4.90 and 0.41 – 0.47 for the tested PTFs. The relative improvement of the newly derived over the tested PTFs ranged from 56.50 – 95.71% in the SDG, 70.73 – 96.89% in the PFA, and 65.37 – 95.81% in the PA. Generally, R was observed to be highest for Model 1 in the SDG, and Model 4 in both PFA and PA, and lowest for Model 5 in all three soils. It was observed that the inclusion of exchangeable calcium and sodium as predictors increased the predictability of the newly derived PTFs.

Keywords: Clay; pedotransfer function; saturated hydraulic conductivity; sand.

1. INTRODUCTION

Hydraulic conductivity is a major parameter in all hydrological models, spanning from physically-based, fully-distributed small-catchment models, to land surface parameterizing schemes of general circulation or global climate models (GCMs) [1,2]. Hydraulic conductivity in saturated soils, referred to as the saturated hydraulic conductivity (K_s) is very crucial in soil and water management with regard to ecology, agriculture and the environment [3,4]. In addition, it is a very significant parameter in the study of processes such as infiltration, irrigation and drainage, runoff and erosion, heat and mass transport in top soils, and solute transport in soils [5–7]. However, direct determination of K_s under both field and laboratory conditions can be very tedious, time constraining, and cost inefficient, especially over large scales [8], and may often result in unreliable data due to soil heterogeneity and experimental errors. As a result, indirect methods are often adopted to estimate K_s from other soil properties. These are categorized into three, namely, pore-size distribution models, inverse methods, and pedotransfer functions [1,9].

Pedotransfer functions are mainly empirical; however, physico-empirical models and fractal theory models are also available [10]. They are generally employed for estimating hydraulic properties from soil properties such as soil texture, bulk density, organic matter content, and water retention [1,10,11]. According to Schaap [11], any PTF may belong to one of three main groups, namely, Class PTFs, Continuous PTFs, and Neural network analysis-derived PTFs. The Class PTFs [e.g. 12–14] are based on the similar media theory [15], wherein, similar soils are assumed to exhibit similar hydraulic properties. Continuous PTFs, which are mainly derived from linear and nonlinear regression models, show a continuous trend of variations among estimated hydraulic properties for defined textural classes [16].

All PTFs are developed from data obtained from a small number of soil samples, and usually do not account for soil structural heterogeneities, which may result in less accurate or poor predictions when applied to soils different from those from which they were developed [7,17]. This implies that the prediction accuracy of PTFs

depends on the similarity between the soils from which they were developed and tested [18]. Inclusion of extra basic soil properties, such as bulk density, porosity, organic matter content, water retention parameters [19–22], and exchangeable sodium and calcium may improve the prediction performance of such models. It is therefore, important to evaluate how well PTFs will perform when applied outside the range of the data that were used to derive them, and to make appropriate modifications where necessary. Thus, the objectives of this study were to:

- i. Evaluate the general reliability of four most commonly cited PTFs to predict K_s of selected Ghanaian soils, where climatic and geological conditions are different from where they were developed and tested;
- ii. Derive and verify, for selected benchmark soils in Ghana, more accurate PTFs to estimate K_s ;
- iii. Test whether the inclusion of exchangeable Na and Ca as input parameters would improve the accuracy of the newly derived PTFs in the present study.

2. MATERIALS AND METHODS

2.1 Soil Sampling, Analysis and Characterization

A set of undisturbed soil samples were collected from the surface 0 – 15 cm depth with a core sampler of 10 cm diameter and 30 cm height. The soils were classified as Stagni-Dystric Gleysol (SDG), Plinthi Ferric Acrisol (PFA) and Plinthic Acrisol (PA). In total, 450 undisturbed cores (150 for each soil class) and two sets of 450 disturbed samples were collected. One set of the disturbed samples was oven-dried and used for the determination of bulk density; the other set was air-dried and sieved through a 2 mm sieve for the determination of particle size distribution, pH, organic matter content, exchangeable sodium, and calcium. Soil bulk density was estimated based on the weight of soil core samples after correcting for soil moisture and the mass and volume of roots and stones [23]. Saturated moisture content was assumed to be equal to the total porosity [24, 25]. Particle size analysis was determined by the hydrometer method. The saturated hydraulic conductivity was determined on laboratory soil columns (i.e., the undisturbed cores) with the falling head permeameter as presented in Fig. 1

[2,26]. The soil textures were sandy, sandy loam, and loamy sand.

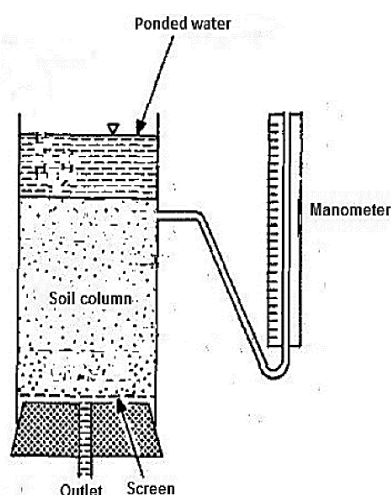


Fig. 1. Laboratory setup for the determination of saturated hydraulic conductivity Source: Tuffour et al. [27]

2.1.1 Collection of soil cores

Soil sampling was done as described by Tuffour [2]. Undisturbed soil cores were collected from the 0 – 15 cm depths in three different fields using a 10 cm diameter PVC pressure sewer pipe with a height of 30 cm, and beveled on the outer part of one end to provide a cutting edge to facilitate the insertion of the core. Soil cores were collected by first digging a circular trench around an intact “pillar” of undisturbed soil which was taller and had a slightly larger diameter than the core sampler. The core sampler was then inserted directly into the pillar of soil by striking a wooden plank positioned across the top of the ring with a mallet. By this, the edges of the pillar were allowed to fall away from the core as it was inserted. Following complete insertion, the core was excavated by hand. A sealant (herein, paraffin wax) was used to ensure good contact between the soil and core, and thereby minimised any edge flow resulting from an air annulus created by the inner ring down the core.

2.1.2 Determination of saturated hydraulic conductivity

Determination of K_s was done as described by Tuffour [2]. Undisturbed soil cores were soaked for 24 hours in water until they were completely saturated. Each saturated core was gently placed on gravels packed in a plastic sieve. The set up was placed in a sink, and water was

gently added to give hydraulic head in the extended cylinder. The fall of the hydraulic head (h_i) on the soil surface was measured as a function of time (t) using a water manometer with a 5-meter scale (Fig. 1). Saturated hydraulic conductivity was calculated by the standard falling head equation given as:

$$K_s = \left(\frac{aL}{At}\right) \ln\left(\frac{h_o}{h_t}\right); \quad (1)$$

where,

a = Surface area of the cylinder [L^2]
 A = Surface area of the soil [L^2]
 h_o = Initial hydraulic head [L]
 L = Length of the soil column [L]
 h_t = Hydraulic head after a given time t [L]

Rewriting equation (1), a regression of $\ln\left(\frac{h_o}{h_t}\right)$ on t with slope $b = K_s\left(\frac{A}{La}\right)$ was obtained. Since $a = A$ in this particular case, K_s was simply calculated as:

$$K_s = bL \quad (2)$$

Samples of measurement data on soil properties from the study are presented in the following Tables 1–3.

2.2 Pedotransfer Functions (PTFs)

Saturated hydraulic conductivity was predicted by relating it to basic soil properties using PTFs. The commonly cited PTFs evaluated were those developed by Puckett et al. [28], Campbell and Shiozawa [29], Dane and Puckett [30], and Ferrer-Julià et al. [31] as presented in equations (3 – 6), respectively:

$$K_s = 156.96 \exp[-0.1975C_l] \quad (3)$$

$$K_s = 54 \exp[-0.07S_a - 0.167C_l] \quad (4)$$

$$K_s = 303.84 \exp(-0.144C_l) \quad (5)$$

$$K_s = 2.556 \times 10^{-7} \exp(0.0491S_a) \quad (6)$$

Additionally, five new PTFs, (Equations 7 – 11), were derived using multiple linear regression (MLR) to relate K_s to particle size distribution, bulk density, exchangeable sodium and calcium, and organic matter content. The derived PTFs (Equations 7 – 11) in this study are:

$$\text{Model 1: } K_s = 0.046158S_a + 0.008362S_i + 0.107176Ca - 1.121352Na \quad (7)$$

$$\text{Model 2: } K_s = 0.02256S_i + 0.06784C_l + 0.29335OM + 0.14592Ca + 33.75189Na \quad (8)$$

$$\text{Model 3: } K_s = 0.1832C_l + 40.9297Na \quad (9)$$

$$\text{Model 4: } K_s = 2.743BD + 1.123Na \quad (10)$$

$$\text{Model 5: } K_s = 0.45615Ca + 37.403333Na \quad (11)$$

where, K_s = Saturated hydraulic conductivity [L/T]; S_a = Sand content; S_i = Silt content; C_l = Clay content; BD = Bulk density; OM = Organic matter; Na = Exchangeable sodium; Ca = Exchangeable calcium

The first model (Model 1) uses sand and silt percentages, and exchangeable calcium and sodium contents. The second model (Model 2) uses silt and clay percentages, organic matter, and exchangeable calcium and sodium contents. The third model (Model 3) uses clay percentage and exchangeable sodium content. The fourth model (Model 4) uses bulk density and exchangeable sodium content. The fifth model (Model 5) uses exchangeable calcium and sodium contents.

2.3 Performance Evaluation of the PTFs

In order to evaluate the performance of the PTFs in predicting K_s , the K_s values estimated from the derived and tested PTFs were compared to the laboratory measured K_s values, and assessed with the root mean square error (RMSE) (Equation 12), index of agreement (d) (Equation 13), correlation coefficient (r) (Equation 14), relative improvement (RI) (Equation 15), and Nash–Sutcliffe efficiency (NSE) (Equation 16). The d statistic was used to avoid problems related with coefficient of determination (R^2).

$$RMSE = \left[\frac{1}{n} \sum_{i=1}^n (d_s - d_o)_i^2 \right]^{1/2} \quad (12)$$

$$d = 1 - \left(\frac{\sum_{i=1}^n (d_s - d_o)_i^2}{\sum_{i=1}^n [(d_s - \bar{d}_o)_i + (d_o - \bar{d}_o)_i]^2} \right) \quad (13)$$

where, n = Number of observations; d_o = Observed data; d_s = Simulated data

$$r = \sqrt{1 - \frac{SSE}{SST}} \quad (14)$$

where, SSE measures the deviations of observations from their predicted values and SST is a measure of the deviations of the observations from their mean.

$$RI = \left(\frac{RMSE_E - RMSE_D}{RMSE_E} \right) \times 100 \quad (15)$$

where, $RMSE_E = RMSE$ of the existing models; $RMSE_D = RMSE$ of the derived models

The Nash–Sutcliffe efficiency was estimated as:

$$NSE = 1 - \frac{\left[\sum_{i=1}^n (d_s - d_o)^2 \right]}{\left[\sum_{i=1}^n (d_s - \bar{d}_o)^2 \right]} \quad (16)$$

where, $d_s =$ Calculated values of K_s ; $d_o =$ Observed values of K_s ; $n =$ Number of observations.

Table 1. Example data of soil properties of the Stagni-Dystric Gleysol

Sample	Soil property								
	Sand (%)	Silt (%)	Clay (%)	Texture	BD (g/cm ³)	OM (%)	Na (cmol/kg)	Ca (cmol/kg)	K _s (cm/min)
1	83.52	8.88	7.60	LS	1.62	0.83	0.040	1.6	0.30
2	87.48	7.32	5.20	LS	1.62	1.24	0.116	1.6	0.18
3	93.52	1.68	4.80	S	1.48	0.28	0.040	1.4	0.47
4	94.37	1.15	4.48	S	1.32	0.14	0.040	1.8	0.59
5	91.52	3.60	4.88	S	1.34	0.48	0.040	1.2	0.39
6	87.6	6.80	5.60	LS	1.34	1.03	0.040	2.2	0.95
7	91.52	3.20	5.28	S	1.57	1.03	0.040	1.0	0.15
8	91.52	3.28	5.20	S	1.52	0.62	0.040	1.0	0.035
9	81.52	13.20	5.28	LS	1.58	0.34	0.040	1.8	0.62
10	87.60	6.64	5.76	LS	1.56	0.32	0.040	1.4	0.83
11	91.52	3.60	4.88	S	1.56	0.34	0.040	1.6	0.18
12	87.48	7.08	5.44	LS	1.70	0.62	0.040	1.2	0.12
13	85.32	9.28	5.40	LS	1.47	0.41	0.040	1.6	0.21
14	92.44	2.48	5.08	S	1.34	0.14	0.040	1.6	0.24
15	92.44	2.76	4.80	S	1.55	0.89	0.040	1.6	0.027

BD = Bulk density; K_s = Saturated hydraulic conductivity; OM = Organic matter; Na and Ca = Exchangeable sodium and calcium; LS = Loamy sand; S = Sand

Table 2. Example data of soil properties of the Plinthi Ferric Acrisol

Sample	Soil property								
	Sand (%)	Silt (%)	Clay (%)	Texture	BD (g/cm ³)	OM (%)	Na (cmol/kg)	Ca (cmol/kg)	K _s (cm/min)
1	86.46	8.56	4.98	LS	1.24	4.47	0.040	5.4	1.50
2	90.38	4.56	5.06	S	1.39	3.64	0.040	6.4	1.20
3	92.60	2.34	5.06	S	1.34	4.47	0.040	8.0	1.32
4	82.38	8.56	9.06	LS	1.38	3.58	0.040	6.6	1.56
5	86.38	6.56	7.06	LS	1.54	3.50	0.040	8.0	0.15
6	82.38	10.56	7.06	LS	1.37	4.53	0.040	8.2	1.47
7	88.38	4.49	7.13	LS	1.38	4.12	0.040	8.0	0.39
8	88.38	6.49	5.13	S	1.50	3.64	0.040	7.0	1.37
9	86.38	6.56	7.06	LS	1.37	3.85	0.040	7.8	0.78
10	84.31	6.49	9.20	LS	1.39	4.05	0.040	7.8	0.90
11	84.67	4.99	10.34	LS	1.46	3.44	0.040	7.4	0.42
12	84.67	6.99	8.34	LS	1.48	2.88	0.040	9.0	0.71
13	84.67	8.99	6.34	LS	1.41	3.85	0.040	7.2	0.80
14	82.67	8.99	8.34	LS	1.50	3.30	0.040	8.0	1.56
15	86.67	4.92	8.41	LS	1.41	3.23	0.040	5.4	1.16

BD = Bulk density; K_s = Saturated hydraulic conductivity; OM = Organic matter; Na and Ca = Exchangeable sodium and calcium; LS = Loamy sand; S = Sand

Table 3. Example data of soil properties of the Plinthic Acrisol

Sample	Soil property								
	Sand (%)	Silt (%)	Clay (%)	Texture	BD (g/cm ³)	OM (%)	Na (cmol/kg)	Ca (cmol/kg)	K _s (cm/min)
1	84.40	8.84	6.76	LS	1.23	1.99	0.040	7.6	0.84
2	82.44	10.88	6.68	LS	1.30	1.85	0.040	4.8	0.65
3	82.44	10.72	6.84	LS	1.36	2.41	0.040	6.0	0.80
4	84.44	8.80	6.76	LS	1.23	2.06	0.0019	4.0	1.19
5	75.16	10.56	14.28	SL	1.26	2.41	0.0019	4.2	1.44
6	80.52	12.64	6.84	LS	1.29	2.20	0.040	6.2	1.13
7	85.60	8.56	5.84	LS	1.48	3.02	0.0019	4.6	1.52
8	85.60	8.56	5.84	LS	1.057	2.47	0.040	2.0	1.58
9	87.60	6.48	5.92	LS	1.13	1.31	0.040	4.8	1.23
10	81.16	8.56	10.28	LS	1.31	3.02	0.040	6.2	2.36
11	83.60	6.48	9.92	LS	1.11	2.61	0.0019	5.2	1.20
12	83.60	8.48	7.92	LS	1.13	2.34	0.040	4.4	0.80
13	87.52	6.56	5.92	LS	1.13	3.23	0.0019	4.4	1.67
14	83.16	10.64	6.20	LS	1.021	2.42	0.0019	3.8	0.41
15	85.24	8.48	6.28	LS	1.048	2.68	0.0019	4.8	2.97

BD = Bulk density; K_s = Saturated hydraulic conductivity; OM = Organic matter; Na and Ca = Exchangeable sodium and calcium; LS = Loamy sand; SL = Sandy loam

3. RESULTS AND DISCUSSION

Saturated hydraulic conductivity was estimated from the above-mentioned PTFs, and compared to measured K_s of the 150 spots in each study site. The performance of the tested PTFs were assessed based on the quality of the estimations when applied on specific soil data from this study. However, since those PTFs were developed from different soil datasets, their predictability was expected to be dependent on the set from which they were developed and those on which they are tested [18]. The results of scatter plots of measured versus estimated K_s for the newly derived and tested PTFs, and their performance statistics are presented in Table 4. The input data required for the PTFs varied upon

the parameters used in developing a particular model. This resulted in variations in their performances in the prediction of K_s. In general, the performances of the well-known PTFs were not good as evidenced by the evaluation indices (i.e., *r*, *d*, RMSE and NSE) as shown in Table 4. This implies that no particular model amongst the well-known PTFs could be said to have yielded the best quality fit for K_s in this study. However, estimated K_s from these PTFs showed a positive correlation with the measured K_s. Generally, the *r* values observed in the study were comparable to those reported by Agyare et al. [32], who reported *r* in the range of 0.29 – 0.41 when NN model, a concept that is very similar to PTF was used to estimate K_s.

Table 4. Goodness-of-fit indicators for the well-known PTFs

Soil	Equation	<i>r</i>	RMSE	<i>d</i>	NSE
Stagni-Dystric Gleysol	P	0.40	4.00	0.45	0.42
	CS	0.35	4.10	0.44	0.41
	DP	0.35	4.90	0.44	0.46
	FJ	0.35	4.30	0.40	0.43
Plinthi Ferric Acrisol	P	0.45	4.10	0.50	0.47
	CS	0.40	4.30	0.39	0.44
	DP	0.43	4.20	0.40	0.44
	FJ	0.41	4.50	0.27	0.46
Plinthic Acrisol	P	0.38	4.10	0.32	0.40
	CS	0.32	4.30	0.36	0.45
	DP	0.32	4.20	0.45	0.42
	FJ	0.32	4.10	0.37	0.44

r = Correlation coefficient; RMSE = Root mean square error; *d* = Index of agreement; P = Puckett et al. [28]; CS = Campbell and Shiozawa [29]; DP = Dane and Puckett [30]; FJ = Ferrer-Julià et al. [31]; NSE = Nash–Sutcliffe efficiency

Since the ultimate goal of this study was to find a suitable PTF to include in soil water management scheduling, it was imperative to also develop PTFs upon the failure of the tested ones (Table 4) to predict K_s . A key aspect of this study, therefore, dealt with the identification of additional soil information that could improve the accuracy of the PTFs, besides the traditional PTF predictors, viz., sand, silt, and clay contents, bulk density, and OM content. This implies that PTF development should be site-specific [33, 34]. From the set of the newly derived PTFs, OM was only applicable in Model 2, even though it was listed among the essential input parameters to build PTFs in this study. A possible reason, according to Tomasella et al. [35] is that not only the quantity, but the quality of organic matter significantly affects soil hydraulic properties. In addition, OM is reported to be an important variable for estimating unsaturated soil hydraulic properties; it has less effect in saturated soils, since OM mainly affects retention forces (matric potential), which are ca. zero in saturated soils [36, 37]. Also, the exchangeable Na and Ca contents, and bulk density made the use of OM unnecessary. Thus, the use of bulk density [35, 38], and exchangeable Na and Ca were effective substitutes for OM in the development of PTFs in this study.

Table 5 presents the performance indices of the newly derived PTFs. While the performances of all the well-known PTFs were generally poor, those of the newly derived PTFs (Models 1 – 5) were highly accurate, as revealed by the very

high r , d , NSE, and very low RMSE values. Contrary to the tested the PTFs, Models 1 – 5 would allow for the assessment of changes in OM, bulk density [39], and exchangeable Na and Ca on K_s . Compared to the best predictor amongst the well-known PTFs, herein, Puckett et al. [28] model with RMSE between 4.00 and 4.10, the newly derived PTFs provided high accuracy, with RMSE not exceeding 1.741. In addition, the NSE values of the derived PTFs ranged between 0.844 – 0.950 in the SDG, 0.854 – 0.982 in the PFA, and 0.892 – 0.972 in the PA. This implies that the PTFs developed from the local datasets had a superior performance over the well-known ones. The relatively poor prediction of the well-known PTFs may be explained by the selection of inappropriate soil properties as predictors [40]. This corroborates the reports by several studies [e.g. 5, 41 – 43] that the performance of PTFs is highly affected by factors such as geographical source of data used for its derivation, and differences in methods of measurement. Additionally, according to Tuffour [2], most theories in soil hydrology, including these well-known PTFs have been developed for standard, clay-rich and organic-rich, and fertile temperate soils. This implies that these models are generally successful for moist environments, but do not always carry over meaningfully over arid and semi-arid regions as in the present study. The newly derived PTFs, thus, are a simple and suitable approach for the determination of K_s in the absence of instrumentation.

Table 5. Goodness-of-fit indicators for the derived PTFs

Soil	Equation	r	RMSE	d	NSE
Stagni-Dystric Gleysol	Model 1	0.892	0.213	0.794	0.844
	Model 2	0.994	0.584	0.920	0.932
	Model 3	0.993	1.040	0.911	0.950
	Model 4	0.994	0.283	0.923	0.873
	Model 5	0.991	1.741	0.874	0.931
Plinthi Ferric Acrisol	Model 1	0.990	0.154	0.893	0.982
	Model 2	0.993	0.212	0.941	0.963
	Model 3	0.991	0.714	0.844	0.940
	Model 4	0.994	0.143	0.921	0.903
	Model 5	0.992	1.204	0.873	0.854
Plinthic Acrisol	Model 1	0.971	0.203	0.863	0.892
	Model 2	0.992	0.534	0.922	0.930
	Model 3	0.991	0.670	0.874	0.952
	Model 4	0.993	0.181	0.911	0.894
	Model 5	0.991	1.422	0.912	0.972

r = Correlation coefficient; RMSE = Root mean square error; d = Index of agreement; NSE = Nash–Sutcliffe efficiency

Table 6. Relative improvement of the derived over the tested PTFs

Soil	Equation	Relative Improvement (%)			
		P	CS	DP	FJ
Stagni-Dystric Gleysol	Model 1	94.75	94.88	95.71	95.12
	Model 2	85.50	85.85	88.16	86.51
	Model 3	74.00	74.63	78.78	75.81
	Model 4	93.00	93.17	94.29	94.65
	Model 5	56.50	57.56	64.49	59.53
Plinthi Ferric Acrisol	Model 1	96.34	96.51	96.43	96.67
	Model 2	94.88	95.11	95.00	95.33
	Model 3	82.68	83.49	83.10	84.22
	Model 4	96.59	94.74	96.67	96.89
	Model 5	70.73	72.09	71.43	73.33
Plinthic Acrisol	Model 1	95.12	95.35	95.24	95.12
	Model 2	87.07	87.67	87.38	87.07
	Model 3	83.66	84.42	84.05	83.66
	Model 4	95.61	95.81	95.71	95.61
	Model 5	65.37	66.98	66.19	65.37

P = Puckett et al. [28]; *CS* = Campbell and Shiozawa [29]; *DP* = Dane and Puckett [30]; *FJ* = Ferrer-Julà et al. [31]

The observation made in the study is a clear evidence of inter-user variability emanating from soil surface characteristics, presence of a protective layer, and land use history of the study site [44] and site specificity of PTFs, which are the key limitations of applying PTFs developed in one region to other regions [45,46]. Hence, the prediction of K_s using PTFs could be well improved by adding input variables such as topographic, vegetation, and land use and/or by enlarging the datasets [47]. This clearly shows the importance of using local data in the development of K_s PTFs as corroborated by [46], who assessed the performances of four PTFs (Jabro, Puckett, Neurotheta, and Rosetta) with a locally derived PTF (Turkey). They reported the lowest RMSE value of 0.74 for the Turkey against Rosetta, which performed best among the four well-known PTFs, with RMSE of 1.61. The index of agreement (d) (Table 5), ranged between 0.79 (for Model 1 in the SDG) and 0.94 (for Model 2 in the PFA), which reflects reasonable performance of the derived PTFs. The d statistic herein reflects the degree to which the observations were accurately estimated by the predictions [43,48]. In all, the results indicate very good performance of the newly derived PTFs in terms of the four statistics used as evaluation indices.

As presented in Table 6, the addition of Ca and Na as input parameters for the derived PTFs improved the predictions of K_s between 57.56% and 95.71% in the SDG, 70.73% and 96.89% in the PFA, and 65.37% and 95.81% in the PA.

Most especially, it was found that K_s was directly affected by exchangeable Na, which was in fact the most important soil property influencing K_s in the soils in this study. The performances of the newly derived PTFs based on their relative improvements over the well-known ones were in the order of Model 1 > Model 4 > Model 2 > Model 3 > Model 5 for the SDG, and the PFA, and Model 4 > Model 1 > Model 2 > Model 3 > Model 5 for the PA. The large improvements may be attributed to the consideration of additional properties, particularly Na as input parameters. The PTF with OM as an input variable (Model 2) performed very well in estimating K_s as reported by Wösten [13] and Vereecken et al. [20]. Similar to fine textured soils as reported by Candemir and Gülser [49], K_s depends on both soil physical and chemical properties in coarse textured soils. The differences in the results between estimates from the newly derived and tested PTFs may not be exclusively due to the inclusion of OM, exchangeable Ca and Na, but also from other factors such as database-related uncertainties and the adopted algorithms [9,44,50].

4. CONCLUSION

This study tested the application of four well-known Pedotransfer Functions (PTFs) in the literature and local data derived PTFs, to identify their levels of accuracy in estimating K_s for some selected benchmark soils in Ghana. Multilinear regression analysis was used to derive the best relationships between K_s and some basic soil properties. The newly derived PTFs provided

more accurate predictions, whereas the well-known PTFs underestimated K_s values for all three soil types. The newly derived PTFs in this study are highly advantageous over the tested ones due to their overall low error levels (i.e., higher r , d and NSE values, and lower RMSE values) and simplicity of their input parameters.

Reliability of the newly developed PTFs (Models 1 – 5) against the well-known ones demonstrated the ability of the newly developed PTFs to accurately predict K_s , and also revealed the shortcomings of the well-known PTFs. The R 's of the newly derived over the tested PTFs were observed to be highest for Model 1 in the SDG, and Model 4 in both PFA and PA, and lowest for Model 5 in all three soils. It was observed that the inclusion of exchangeable Ca and Na as predictors increased the predictability of the newly derived PTFs. Thus, inclusion of additional soil parameters which influence soil aggregation and structure improved the prediction accuracy of the newly derived PTFs. Another alternative could be the development of soil class specific PTF models in future studies.

COMPETING INTERESTS

Authors have declared that no competing interests exist.

REFERENCES

- Sobieraj JA, Eisenbeer H, Vertessy RA. Pedotransfer functions for estimating saturated hydraulic conductivity: implications for modeling storm flow generation. *J. Hydrol.* 2001;251(3-4):202-220.
- Tuffour HO. Physically based modelling of water infiltration with soil particle phase. Ph.D. Dissertation, Kwame Nkrumah University of Science and Technology, Ghana; 2015.
- Yao RJ, Yang JS, Wu DH, Li FR, Gao P, Wang XP. Evaluation of pedotransfer functions for estimating saturated hydraulic conductivity in coastal salt-affected mud farmland. *J. Soils Sed.* 2015;15:902-916.
- Zhao C, Shao M, Jia X, Nasir M, Zhang C. Using pedotransfer functions to estimate soil hydraulic conductivity in the Loess Plateau of China. *Catena.* 2016;143:1-6.
- Cornelis WM, Ronsyn J, Van Meirvenne M, Hartmann R. Evaluation of pedotransfer functions for predicting the soil moisture retention curve. *Soil Sci. Soc. Am. J.* 2001; 65:638-648.
- Aimrun W, Amin MSM, Eltaib SM. Effective porosity of paddy soils as an estimation of its saturated hydraulic conductivity. *Geoderma* 2004;121:197-203.
- Langhans C, Govers G, Diels J, Clymans W, Van Den Putte A. Dependence of effective hydraulic conductivity on rainfall intensity: loamy agricultural soils. *Hydrol. Proc.* 2010;24(16):2257-2268.
- Saxton KE, Rawls WJ. Soil water characteristic estimates by texture and organic matter for hydrologic solutions. *Soil Sci. Soc. Am. J.* 2006;70:1569-1578.
- Schaap MG, Leij FJ, van Genuchten MTh. Rosetta: A computer program for estimating soil hydraulic parameters with hierarchical pedotransfer functions. *J. Hydrol.* 2001;251(3-4):163-176.
- Minasny B, Mcbratney AB. Evaluation and development of hydraulic conductivity pedotransfer functions for Australian soil. *Aust. J. Soil Res.* 2000;38:905-926.
- Schaap MG. Rosetta Version 1.0. US Salinity Laboratory, USDA, ARS: Riverside, CA.; 1999. Available:<http://www.usssl.ars.usda.gov/models/rosetta/rosetta.htm> (Accessed: 24/06/2017)
- Carsel RF, Parrish RS. Developing joint probability distributions of soil water retention characteristics. *Water Res. Res.* 1988;20:682-690.
- Wösten JHM, Finke PA, Jansen MJW. Comparison of class and continuous pedotransfer functions to generate soil hydraulic characteristics. *Geoderma.* 1995; 66:227-237.
- Leij FJ, Alves WJ, van Genuchten MTh, Williams JR. The UNSODA unsaturated soil hydraulic database, version 1.0, EPA Report EPA/600/R-96/095, EPA National Risk Management Laboratory, G-72, Cincinnati, OH, USA; 1996. Available:<http://www.usssl.ars.usda.gov/MODELS/UNSODA.HTM> (Accessed: 24/06/2017)
- Miller EE, Miller RD. Physical theory for capillary flow phenomena. *J. App. Phy.* 1956;27:324-264.
- Obiero JPO. Pedotransfer functions for saturated hydraulic conductivity for surface runoff modelling. Ph.D. Thesis, Department of Environmental and Biosystems Engineering, University of Nairobi, Kenya; 2013.

17. Hodnett MG, Tomasella J. Marked differences between van Genuchten soil water-retention parameters for temperate and tropical soils: A new water-retention pedo-transfer functions developed for tropical soils. *Geoderma*. 2002;108:155-180.
18. Tomasella J, Hodnett MG, Rossato L. Pedotransfer functions for the estimation of soil water retention in Brazilian soils. *Soil Sci. Soc. Am. J.* 2000;64:327-338.
19. Rawls WJ, Brakensiek DL. Prediction of soil water properties for hydrologic modeling. In: Jones, EB, Ward TJ. (Eds.) *Watershed Management in the eighties*. Proc. Irrigation and Drainage Division, ASCE Denver, CO. 1985;293-299.
20. Vereecken H, Maes J, Feyen J, Darius P. Estimating the soil moisture retention characteristic from texture, bulk density, and carbon content. *Soil Sci.* 1989;148: 389-403.
21. Rawls WJ, Ahuja LR, Brakensiek DL. Estimating soil hydraulic properties from soils data. In: van Genuchten MTh et al. (Eds.). *Indirect methods for estimating the hydraulic properties of unsaturated soils*. Proceedings Int. Workshop, Riverside, CA Oct. 11-13. 1989. University of California, Riverside, CA. 1992;329-340.
22. Williams RD, Ahuja LR, Naney JW. Comparison of methods to estimate soil water characteristics from limited texture, bulk density, and limited data. *Soil Sci.* 1992;153:172-184.
23. Culley JLB. Density and compressibility. In: Carter MR. (Ed.). *Soil sampling and methods of analysis*. Canadian Society of Soil Science, Lewis Publishers, CRC Press, Boca Raton, Fl. 1993;529-539.
24. van Genuchten MTh. A closed-form equation for predicting the hydraulic conductivity of unsaturated soils. *Soil Sci. Soc. Am. J.* 1980;44(5):892-898.
25. Brakensiek DL, Rawls WJ, Stephenson GR. Modifying SCS hydrologic soil groups and curve numbers for rangeland soils. ASAE paper no. PNR-84203, St. Joseph, MI; 1984.
26. Bonsu M, Laryea KB. Scaling the saturated hydraulic conductivity of an Alfisol. *J. Soil Sci.* 1989;40:731-742.
27. Tuffour HO, Bonsu M, Abubakari A, Bashagaluke JB, Opoku MA, Oppong JC. Scaling of infiltration rate using the similar media theory and dimensional analysis. *Eura. J. Soil Sci.* 2018;7(4):308-317.
28. Puckett WE, Dane JH, Hajek BF. Physical and mineralogical data to determine soil hydraulic properties. *Soil Sci. Soc. Am. J.* 1985; 49: 831-836.
29. Campbell GS, Shiozawa S. Prediction of hydraulic properties of soils using particle size distribution and bulk density data. In: van Genuchten MTh et al. (Eds.). *Proceedings of the International Workshop on Indirect Methods for Estimating the Hydraulic Properties of Unsaturated Soils*. University of California Riverside, Riverside, CA., 1994; 317-328.
30. Dane JH, Puckett W. Field soil hydraulic properties based on physical and mineralogical information. In: van Genuchten MTh et al. (Eds.). *Proceedings of the International Workshop on Indirect Methods for Estimating the Hydraulic Properties of Unsaturated Soils*, University of California Riverside, Riverside, CA, 1994; 389-403.
31. Ferrer-Julà M, Estrela Monreal T, Sánchez Del Corral Jiménez A, García Meléndez E. Constructing a saturated hydraulic conductivity map of Spain using pedotransfer functions and spatial prediction. *Geoderma* 2004; 123: 275-277.
32. Agyare WA, Park WA, Vlek PLG. Artificial neural network estimation of saturated hydraulic conductivity. *Vadose Zone J.* 2007; 6: 423-431.
33. Pringle MJ, Lark RM. Scale- and location-dependent correlations of soil strength and the yield of wheat. *Soil Till. Res.* 2007; 95: 47-60.
34. Pringle MJ, Romano N, Minasny B, Chirico GB, Lark RM. Spatial evaluation of pedotransfer functions using wavelet analysis. *J. Hydrol.* 2007; 333: 182-198.
35. Tomasella J, Pachepsky YA, Crestana S, Rawls WJ. Comparison of Two Techniques to Develop Pedotransfer Functions for Water Retention. *Soil Sci. Soc. Am. J.* 2003; 67: 1085-1092.
36. Wösten JHM, Lilly A, Nemes A Le Bas C. Development and use of a database of hydraulic properties of European soils. *Geoderma* 1999; 90: 169-185.
37. Rasoulzadeh A. Estimating Hydraulic Conductivity Using Pedotransfer Functions, Hydraulic Conductivity-Issues, Determination and Applications. In: Elango L (Ed.). ISBN: 978-953-307-288-3, InTech.

38. Bloemen GW. Calculation of hydraulic conductivities of soils from texture and organic matter content. Z. Pflanzenernaehr. Bodenk 1980; 143 (5): 581-615.
39. Jabloun M, Sahli A. Development and comparative analysis of pedotransfer functions for predicting soil water characteristic content for Tunisian soil. Proceedings of the 7th Edition of TJASSST. 2006;170-178.
40. Wang Y, Shao M, Liu Z. Pedotransfer functions for predicting soil hydraulic properties of the Chinese loess plateau. Soil Sci. 2012;177:424-432.
41. Wagner B, Tarnawski VR, Hennings V, Müller U, Wessolek G, Plagge R. Evaluation of pedo-transfer functions for unsaturated soil hydraulic conductivity using an independent data set. Geoderma. 2001;102:275-297.
42. Ghorbani Dashtaki Sh, Homae M, Khodaverdilloo H. Derivation and validation of pedotransfer functions for estimating soil water retention curve using a variety of soil data. Soil Use Man. 2010;26:68-74.
43. Khodaverdilloo H, Homae M, van Genuchten MTh, Ghorbani Dashtaki S. Deriving and validating pedotransfer functions for some calcareous soils. J. Hydrol. 2011;399:93-99.
44. Jarvis NJ, Zavattaro L, Rajkai K, Reynolds WD, Olsen PA, McGechan M, Mecke M, Mohanty B, Leeds-Harrison PB, Jacques D. Indirect estimation of near-saturated hydraulic conductivity from readily available soil information. Geoderma. 2002;108:1-17.
45. Li Y, Chen D, White RE, Zhu A, Zhang J. Estimating soil hydraulic properties of Fengqiu County soils in the North China Plain using pedotransfer functions. Geoderma. 2007;138:261-271.
46. Haghverdi A, Öztürk HS, Ghosi S, Tunçay T. Estimating saturated hydraulic conductivity using different well-known pedotransfer functions. In: Newton I, Einstein A. (Eds.). Instructions for Short Papers for the Agro Environ Conference, Wageningen; 2012.
47. Tamari S, Wösten JHM, Ruiz-Suarez JC. Testing an artificial neural network for predicting soil hydraulic conductivity. Soil Sci. Soc. Am. J. 1996;60:172-174.
48. Willmott CJ. On the validation of models. Phys. Geogr. 1981;2:184-194.
49. Candemir F, Gülser C. Influencing factors and prediction of hydraulic conductivity in fine textured alkaline soils. Arid Land Res. Man. 2012;26(1):15-31.
50. Nemes A, Schaap MG, Wösten JHM. Functional evaluation of pedotransfer functions derived from different scales of data collection. Soil Sci. Soc. Am. J. 2003; 67:1093-1102.

© 2019 Tuffour et al.; This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Peer-review history:

The peer review history for this paper can be accessed here:

<http://www.sdiarticle3.com/review-history/47970>