



Application of *Moringa oleifera* Powder and Seeds to Remove Turbidity from Water

**Semirames do N. Silva^{1*}, Suiane M. Moraes¹, Joana D'arc P. Matos¹,
Roberta de S. O. Wanderley², Luís P. F. R. Silva¹, Antônio J. R. Barroso³
and Josivanda P. Gomes¹**

¹Department of Agricultural Engineering, Federal University of Campina Grande, Campina Grande, Brazil.

²Department of Process Engineering, Federal University of Campina Grande, Campina Grande, Brazil.

³Federal Institute of Pernambuco, Belo Jardim Campus, Pernambuco, Brazil.

Authors' contributions

This work was carried out in collaboration among all authors. Author SNS developed the following research. Authors SMM and JDPM were responsible for the bibliographic review. Authors RSO, LPFRS and AJRB assist in conducting the analysis and interpretation of the data obtained in the research and author JPG research supervisor. All authors read and approved the final manuscript.

Article Information

DOI: 10.9734/AJRCS/2019/v4i330074

Editor(s):

- (1) Dr. Syamsul Bahari Bin Abdullah, Senior Lecturer, Faculty of Chemical and Natural Resources Engineering, Universiti Malaysia Pahang, Malaysia.
- (2) Dr. Leandro A. Pasa, Professor, Campus Medianeira da Universidade Tecnológica Federal do Paraná, Brazil.
- (3) Dr. Bojan Stipesevic, Faculty of Agriculture, University of Osijek, Croatia.
- (4) Dr. Al-Kazafy Hassan Sabry, Assistant Professor, Department of Pests and Plant Protection, National Research Centre, Cairo, Egypt.

Reviewers:

- (1) J. Dario Aristizabal-Ochoa, Universidad Nacional de Colombia at Medellin, Colombia.
- (2) Fatehah Mohd Omar, Universiti Sains Malaysia, Malaysia.
- (3) G. Muthuraman, University of Madras, India.

Complete Peer review History: <http://www.sdiarticle3.com/review-history/50143>

Original Research Article

Received 04 June 2019
Accepted 16 August 2019
Published 17 August 2019

ABSTRACT

Aims: The use of natural, on-site, low-cost coagulants can reduce problems related to the consumption of non-potable water and untreated wastewater discharges into receiving bodies. A natural solution for acting as a coagulant is the *Moringa oleifera* seed. The objective of this study is to analyze the efficiency of turbidity removal through the application of moringa seeds as a natural coagulant in three different retention times.

Methodology: The research was carried out at the Agricultural Products Storage Processing Laboratory of the Federal University of Campina Grande. The powder obtained after trituration of

*Corresponding author: Email: semirames.agroecologia@gmail.com;

the seeds and the seed without bark was used. A jar test was used to test the application of the coagulant based on powder and moringa seeds. To obtain artificial water, 0.5 g of clay was added to the jars of the jar test. The Jar Test was connected to a rotation of 120 rpm for 30 minutes, then was turned off and kept at rest for 45, 53 and 61 minutes. Subsequently, approximately 50 mL of sample was collected from each pitcher for analysis of the turbidity parameter.

Results: The application of the seeds was more efficient than the powder. Sedimentation times influenced the removal of turbidity.

Conclusion: The turbidity values are outside of what is allowed by current Brazilian legislation.

Keywords: Coagulant; efficiency; plants; water treatment.

1. INTRODUCTION

Water is necessary for the economic, social and political development of a country. Due to the hydrological cycle, water is renewable, but because it is too contaminated in its springs, it undergoes a process of potability, which can often require a high investment. For a long time, the conventional water treatment process has been known, which transforms freshwater into drinking water, when submitted to processing, usually called classic or complete, performed in a conventional water treatment plant [1].

The most commonly used coagulants in water treatment plants (ETAs) are inorganic, trivalent salts of iron and aluminium or synthetic polymers. Despite the proven performance and cost-effectiveness of chemical coagulants, natural coagulants/flocculants are being studied, of which some biopolymers are being investigated more intensively, as is the case of *M. oleifera* [2].

Among the coagulants, the most commonly used are aluminium sulphate and ferric chloride. Ndabigengesere and Narasiah [3] have pointed to several drawbacks of the use of aluminium salts, such as Alzheimer's disease and similar health problems associated with residual aluminium in treated waters. According to Ghebremichael [4], when compared to chemical coagulants, moringa seed has several advantages, among them: reduced need for pH readjustment, low operation cost and reduced sludge volumes.

Moringa seeds have been widely used to remove water turbidity for drinking purposes, especially in rural communities where water treatment does not occur [5]. In places where there is no water supply through the distribution network or where there are no improved water sources, it is possible to treat water at the point of use to make it safer for human consumption. An alternative that can be used, in certain situations, is the

application of *Moringa oleifera* seed powder to clarify turbid waters.

The use of moringa seeds for water purification is an economical alternative. A small dosage of this biopolymer can greatly reduce the consumption of chemical coagulants, making it a viable alternative in water treatment to chemical coagulants due to its coagulant properties and its ability to remove bacteria [6].

Due to its versatility, the moringa presents effective action on various types of water, as well as various types of effluents. The methods of application of natural coagulants in water are still empirical, requiring scientific work to prove its effectiveness in water treatment. The objective of this study is to analyze the efficiency of turbidity removal through the application of moringa seeds as a natural coagulant in three different retention times.

2. MATERIALS AND METHODS

2.1 Research Venue

The research was carried out at the Agricultural Products Storage Processing Laboratory of the Federal University of Campina Grande, Paraiba. Two different methods of coagulant application were tested.

2.2 Preparation of Coagulant

The first was the direct method with the application of seeds without peel, which was peeled manually before application. To obtain the powder, the seeds were crushed in a domestic blender.

2.3 Application of Coagulant

Initially, the water was characterized by high turbidity, using distilled water, to be compared with the water after the application of the

Table 1. Initial characterization of water with high turbidity

Parameter	Standard (distilled water)	Addition of 0.5 g of clay
Turbidity (NTU*)	0.09	287

Note: *Nephelometric turbidity unit

coagulant. A jar test was used for the coagulant application tests based on powder and moringa seeds. In the jar test, 12 g of powder and seeds were introduced to 500 mL of water with turbidity obtained by adding 0.5 g of clay (Table 1).

The equipment was connected to a rotation of 120 rpm for 30 minutes, then was turned off and kept at rest for 45, 53 and 61 minutes. Subsequently, approximately 50 mL of sample was collected from each Jar Test pitcher for analysis of the turbidity parameter, to verify the removal efficiency by comparing the results with the water before treatment. The turbidity analysis of the samples was the portable equipment using a micro processed digital turbidimeter model DLT-WV.

3. RESULTS AND DISCUSSION

The coagulant obtained from the seeds of *M. oleifera*, usually, presents satisfactory results regarding the removal of turbidity, achieving reductions of 80 to 99% for this parameter [7]. However, in the course of the study, there were large variations in the percentage of removal (Fig. 1).

The application of the powder presented removal efficiency of 41.46, 44.6 and 62.37%, respectively, for the sedimentation times studied, while the seeds presented efficiency of 51.57, 52.96 and 58.88% of efficiency in removing this parameter, being more efficient than the powder.

It was observed that the sedimentation times influenced the turbidity removal, since, with the gradual increase of the sedimentation time, the turbidity decreased. However, the turbidity values are outside of what is allowed by current legislation. Ordinance N°. 5/2017 of the Ministry of Health establishes a maximum value of 5.0 NTU for turbidity in water considered potable [8].

Pereira et al. [9] verified that for the removal of turbidity the solution containing *Moringa oleifera* presented better values for 100 NTU, obtaining a reduction of 70.67%, for the time of 30 minutes, and for 150 NTU reducing 56%, in the time of 10 minutes. Muniz et al. [10] when studying the use of moringa seeds in the removal of water turbidity found that the seeds without bark provided a reduction from 400 to 0.8 NTU. Lo Monaco et al. [11] when evaluating the sedimentation times of 2 and 24 h observed that the time of 24 h provides greater reductions in water turbidity. Pritchard et al. [12] obtained, using moringa seeds confined in sachets in the treatment of water with a turbidity of 146 UNT, a reduction in turbidity of approximately 85% in sedimentation tests.

Moringa has not been applied as a primary coagulant only in the treatment of natural surface water, but also in wastewater from domestic and industrial effluents. In the treatment of industrial effluents, Song et al. [13] evaluated residual water from tanneries by applying *Moringa oleifera* in the removal of suspended solids (30-37%) and chromium (38-46%).

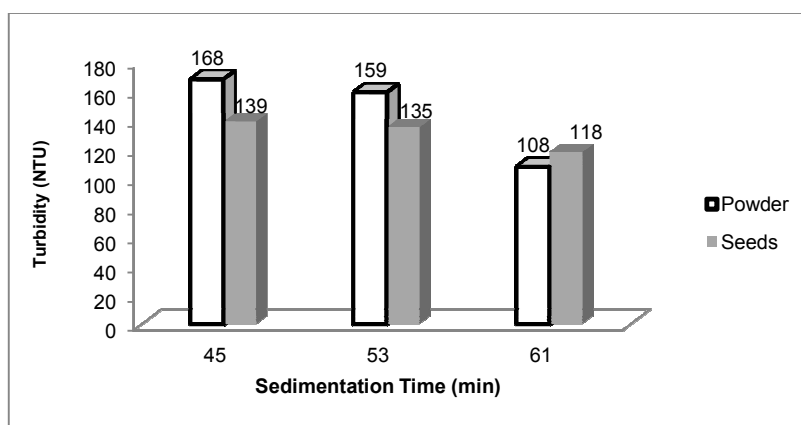


Fig. 1. Removal of water turbidity with the application of powder and moringa seeds

A negligible interference characteristic has also been demonstrated in the effluent pH values. The results obtained support the hypothesis that the use of natural coagulant from *Moringa oleifera* seeds may be satisfactory in the treatment of textile effluents by restricting the use of chemical substances, such as aluminium sulphate [14].

4. CONCLUSION

The objective of the study was to analyze the efficiency of turbidity removal through the application of moringa seeds as a natural coagulant in three different retention times. The study revealed that there were large variations in the efficiency of turbidity removal. Seed application was more efficient than dust. The sedimentation times influenced the turbidity removal because, with the gradual increase of the sedimentation time, the turbidity decreased. Based on the conditions under which the survey was conducted, the turbidity values are outside the scope of current legislation.

ACKNOWLEDGEMENTS

Agricultural Products Storage Processing Laboratory of the Federal University of Campina Grande, Paraiba and Water and Sewage Treatment Plant of Campina Grande, Brazil.

COMPETING INTERESTS

Authors have declared that no competing interests exist.

REFERENCES

1. Damayanti A, Salim Zumr. The influence of PAC, zeolite and *Moringa oleifera* as biofouling reducer (BFR) on hybrid membrane bioreactor of palm oil mill effluent (POME). *Bioresource Technology*. 2011; 102:4341-4346.
2. Franco CS, Batista MDA, Oliveira LFC, Kohn GP, Fia R. Coagulation with *Moringa oleifera* seed prepared by different methods in waters with turbidity from 20 to 100 UNT. *Sanitary and Environmental Engineering*. 2017; 22(4):781-788.
3. Ndabigengesere A, Narasiah KS. Use of *Moringa oleifera* seeds as a primary coagulant in wastewater treatment. *Environmental Technology*. 1998;19(8): 789-800.
4. Ghebremichael KA. *Moringa oleifera* seed and pumice as alternative natural materials for drinking water treatment. Stockholm: Department of Land and Water Resources Engineering; 2004.
5. Arantes CC, Ribeiro TAP, Paterniani JES. Processamento de sementes de *Moringa oleifera* utilizing different equipment to obtain a coagulant solution. *Brazilian Journal of Agricultural and Environmental Engineering*. 2012;16:661-666.
6. Bongiovani MC, Valverde KC, Bergamasco R. Utilization of the combined process coagulation/flocculation/uf as an alternative process to the conventional treatment using *Moringa oleifera* lam as coagulant. *Alta Paulista Environmental Forum*, 2013; 9(11):65-76.
7. Bhatia S, Othman Z, Ahmad AL. Pretreatment of palm oil mill effluent (POME) using *Moringa oleifera* seeds as natural coagulant. *Journal of Hazardous Materials*. 2007;145:120-126.
8. Brazil. Ministry of Health. Consolidation Ordinance No. 5 of September 28, 2017. Consolidation of rules on health actions and services of the Unified Health System. *Federal Official Gazette, Brasília*; 2017.
9. Pereira ER, Francisco AA, Theodoro JDP, Bergamasco R, Fidelis R. Comparison between the application of the natural coagulant moringa oleifera and the chemical coagulant aluminum sulfate in the treatment of water with different levels of turbidity. *Encyclopedia Biosfera, Scientific Center Know*. 2015;11(21):3010-3020.
10. Muniz GL, Duarte FV, Oliveira SB. Use of *Moringa oleifera* seeds to remove water turbidity for supply. *Environment & Water Magazine*. 2015;10(2):454-463.
11. Lo Monaco PAV, Matos AT, Ribeiro ICA, Nascimento FS, Sarmiento AP. Use of moringa seed extract as a coagulating agent in the treatment of water supply and wastewater.

- Environment & Water Magazine. 2010;5(3): 222-231.
12. Pritchard MT, Craven T, Mkandawire T, Edmondson AS, O'Neill JG. A comparison between *Moringa oleifera* and chemical coagulants in the purification of drinking water - An alternative sustainable solution for developing countries. Physics and Chemistry of the Earth, 2010;35:798-805.
 13. Song Z, Williams CJ, Edyvean RGJ. Treatment of tannery wastewater by chemical coagulation. Desalination, 2004; 164(3):249-259.
 14. Paula HM, Ilha MSO. *Moringa oleifera* use in concrete plants wastewater treatment: Mapping study. Revista Eletrônica de Engenharia Civil. 2016;11(1):50-60.

© 2019 Silva et al.; This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Peer-review history:
The peer review history for this paper can be accessed here:
<http://www.sdiarticle3.com/review-history/50143>